

Description

Basic information

Family: CLOVE LRK GK
Product: CLOVE LRK GK PLX 24V 9,6W/m 140 LED/m 830 8 1000
Index: BLS0000008455
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	876
Power of luminaire [W]	11
Luminaire's light efficiency [lm/W]	80
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	III
Protection degree	IP20
Voltage	24VDC
Operating temperature range [°C]	5 ÷ 30
Driver	No driver

Mechanical parameters:

Assembly	recessed into the plasterboard ceiling
Material	aluminum
Color	anodized aluminum
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	1000 x 46.2 x 24.5

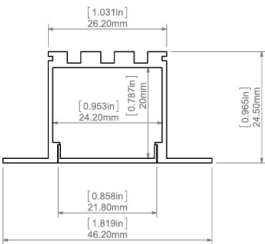

A graph of light

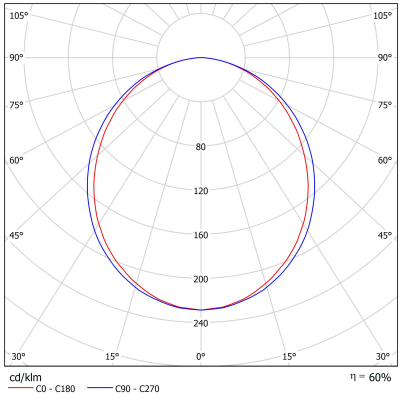

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025