

## Description

## Basic information

Family: **CLOVE HRL G**  
 Product: **CLOVE HRL G PLX 12V 14W/m IP67 840 9 1000**  
 Index: **BLS0000008492**  
 Pictograms:




## Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>983</b>
Power of luminaire [W]	15
<b>Luminaire's light efficiency [lm/W]</b>	<b>66</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>III</b>
Protection degree	IP67
<b>Voltage</b>	<b>12VDC</b>
Operating temperature range [°C]	5 ÷ 30
<b>Driver</b>	<b>No driver</b>

### ● Mechanical parameters:

Assembly	ground-mounted
<b>Material</b>	<b>aluminum</b>
Color	anodized aluminum
<b>Diffuser</b>	<b>PLX opalized</b>
Impact resistant	IK04
<b>Dimensions [mm]</b>	<b>1000 x 26 x 26</b>



## ● A graph of light

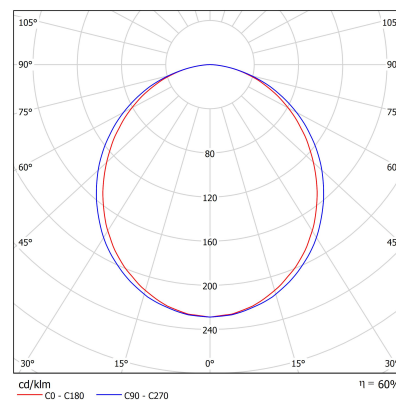

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 01-08-2025