



Description

Basic information

Family: CLOVE HRL G
Product: CLOVE HRL G PLX 24V 14,4W/m 70 LED/m IP67 830 11 1000
Index: BLS0000008497
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1159
Power of luminaire [W]	16
Luminaire's light efficiency [lm/W]	72
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	III
Protection degree	IP67
Voltage	24VDC
Operating temperature range [°C]	5 ÷ 30
Driver	No driver

Mechanical parameters:

Assembly	ground-mounted
Material	aluminum
Color	anodized aluminum
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	1000 x 26 x 26



A graph of light

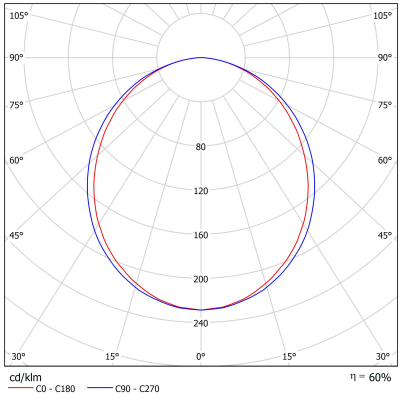

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 01-08-2025