




Description

Basic information

Family: **CLOVE HRL G**
 Product: **CLOVE HRL G PLX 24V 7,2W/m 70 LED/m IP67 840 6 1000**
 Index: **BLS0000008498**
 Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	668
Power of luminaire [W]	9
Luminaire's light efficiency [lm/W]	74
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	III
Protection degree	IP67
Voltage	24VDC
Operating temperature range [°C]	5 ÷ 30
Driver	No driver

● Mechanical parameters:

Assembly	ground-mounted
Material	aluminum
Color	anodized aluminum
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	1000 x 26 x 26



● A graph of light

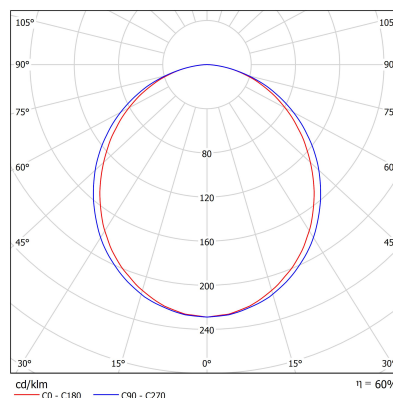

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025