




Description

Basic information

Family: CLOVE PDS N  
Product: CLOVE PDS N PLX 12V 14W/m 840 9 1000  
Index: BLS0000008432  
Pictograms:

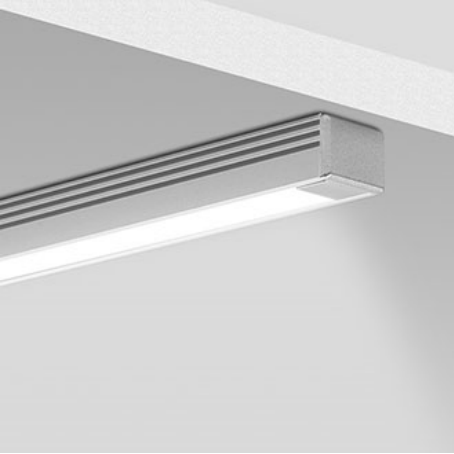


Lighting and electrical parameters


|                                     |           |
|-------------------------------------|-----------|
| Light source                        | LED       |
| Luminaire luminous flux [lm]        | 983       |
| Power of luminaire [W]              | 15        |
| Luminaire's light efficiency [lm/W] | 66        |
| Color of the light [K]              | 4000      |
| CRI                                 | >80       |
| SDCM (LED sources)                  | 3         |
| Protection against electric shock   | III       |
| Protection degree                   | IP20      |
| Voltage                             | 12VDC     |
| Operating temperature range [°C]    | 5 ÷ 30    |
| Driver                              | No driver |

Mechanical parameters:

|                  |                   |
|------------------|-------------------|
| Assembly         | ceiling mounted   |
| Material         | aluminum          |
| Color            | anodized aluminum |
| Diffuser         | PLX opalized      |
| Impact resistant | IK04              |
| Dimensions [mm]  | 1000 x 16 x 12    |



A graph of light

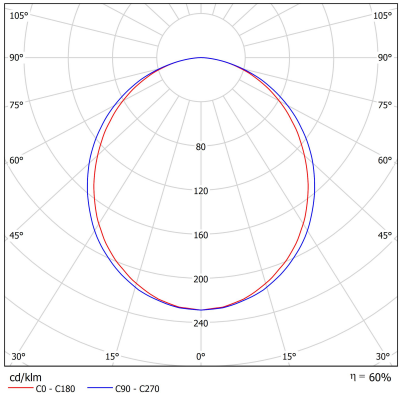

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 18-08-2025