

CALLUNA O PLX



Description

CALLUNA O luminaire is built from aluminium polished body. The shade is a transparent PMMA. Mounted reflector and rasters eliminate glare and provide proper light distribution. Application: outdoor spaces around buildings, vehicles, circulation area, gardens.

Basic information

Family: CALLUNA O PLX
Product: CALLUNA O PLX G IP65 BL 840 15 800
Index: BLS0000008882
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1551
Power of luminaire [W]	20
Luminaire's light efficiency [lm/W]	78
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	- 30 ÷ +30
Driver	LED driver

Mechanical parameters:

Assembly	ground-mounted
Material	aluminum
Color	black
Diffuser	PLX opalized
Impact resistant	IK10
Dimensions [mm]	D120 x 800



A graph of light

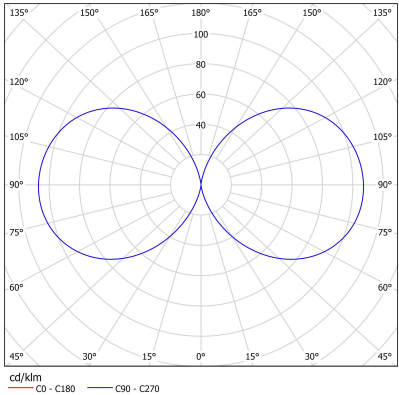

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025

Accessories

Index	BLS0000005918
Name	Fundament maly 15kg

