




## Description

Industrial luminaire IVY O is made from aluminium lacquered anthracitic. IVY O does not have a diffuser. Luminaire's interesting shape and design come with high resistance to the tough environmental conditions in which the product will be working. IVY O features high lighting efficiency and other technical parameters. All these characteristics make IVY O one of the most economical models on the market. The colour temperature is 4000 K and colour rendering index CRI > 80. The luminaire is ready to work in temperature that fluctuates from -30°C to even +45°C. The cooling radiator efficiently eliminates unnecessary heat. It is possible to mount the luminaire with the regulated bracket, which allows adjusting the lighting angles to our needs. IVY O is perfect for production halls/plants, warehouses and magazines. This luminaire is a great choice for those clients, who appreciate the functionality and original look at the same time.

## Basic information

|             |                                           |
|-------------|-------------------------------------------|
| Family:     | <b>IVY O</b>                              |
| Product:    | <b>IVY O Z OPT60 IP65 BL 840 267 D387</b> |
| Index:      | <b>BLS0000009101</b>                      |
| Pictograms: |                                           |




## Lighting and electrical parameters


|                                            |                          |
|--------------------------------------------|--------------------------|
| Light source                               | LED                      |
| <b>Luminaire luminous flux [lm]</b>        | <b>26700</b>             |
| Power of luminaire [W]                     | 150                      |
| <b>Luminaire's light efficiency [lm/W]</b> | <b>178</b>               |
| Color of the light [K]                     | 4000                     |
| <b>CRI</b>                                 | <b>&gt;80</b>            |
| SDCM (LED sources)                         | 3                        |
| <b>Protection against electric shock</b>   | <b>I</b>                 |
| Protection degree                          | IP65                     |
| <b>Voltage</b>                             | <b>220-240V, 50-60Hz</b> |
| Lifetime of LED sources [h]                | 100000                   |
| <b>Lx/By</b>                               | <b>L80/B50</b>           |
| Operating temperature range [°C]           | -20 ÷ +50                |
| <b>Driver</b>                              | <b>LED driver</b>        |

## Mechanical parameters:

|                    |                 |
|--------------------|-----------------|
| Assembly           | pendant         |
| <b>Material</b>    | <b>aluminum</b> |
| Color              | anthracite      |
| <b>Diffuser</b>    | <b>lenses</b>   |
| Impact resistant   | IK09            |
| <b>Weight [kg]</b> | <b>5.00</b>     |
| Dimensions [mm]    | ø387 x 160      |

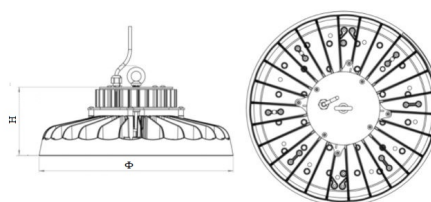

## A graph of light

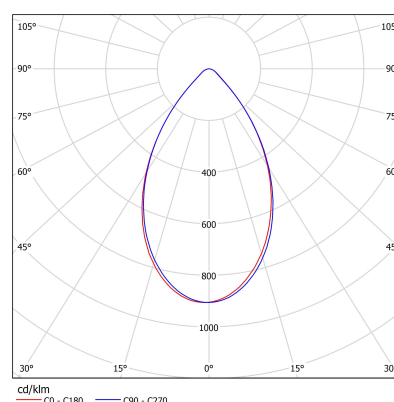

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025