



## Description

Industrial luminaire IVY O is made from aluminium lacquered anthracite. IVY O does not have a diffuser. Luminaire's interesting shape and design come with high resistance to the tough environmental conditions in which the product will be working. IVY O features high lighting efficiency and other technical parameters. All these characteristics make IVY O one of the most economical models on the market. The colour temperature is 4000 K and colour rendering index CRI > 80. The luminaire is ready to work in temperature that fluctuates from -30°C to even +45°C. The cooling radiator efficiently eliminates unnecessary heat. It is possible to mount the luminaire with the regulated bracket, which allows adjusting the lighting angles to our needs. IVY O is perfect for production halls/plants, warehouses and magazines. This luminaire is a great choice for those clients, who appreciate the functionality and original look at the same time.

## Basic information

Family:	<b>IVY O</b>
Product:	<b>IVY O Z SH IP65 BL 840 352 D387</b>
Index:	<b>BLS0000009103</b>
Pictograms:	




## Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>35200</b>
Power of luminaire [W]	200
<b>Luminaire's light efficiency [lm/W]</b>	<b>176</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>I</b>
Protection degree	IP65
<b>Voltage</b>	<b>220-240V, 50-60Hz</b>
Lifetime of LED sources [h]	100000
<b>Lx/By</b>	<b>L80/B50</b>
Operating temperature range [°C]	-20 ÷ +50
<b>Driver</b>	<b>LED driver</b>

## Mechanical parameters:

Assembly	pendant
<b>Material</b>	<b>aluminum</b>
Color	anthracite
<b>Diffuser</b>	<b>transparent tempered glass</b>
Impact resistant	IK09
<b>Weight [kg]</b>	<b>5.00</b>
Dimensions [mm]	ø387 x 136

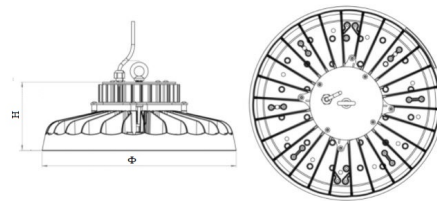

## A graph of light

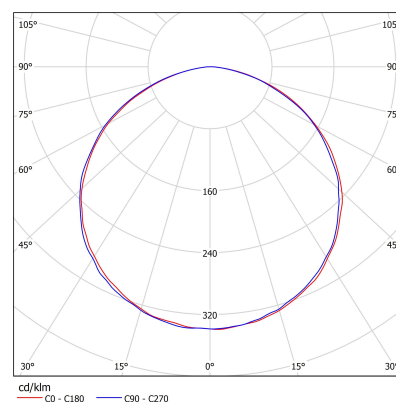

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025