



Description

Industrial luminaire IVY O is made from aluminium lacquered anthracite. IVY O does not have a diffuser. Luminaire's interesting shape and design come with high resistance to the tough environmental conditions in which the product will be working. IVY O features high lighting efficiency and other technical parameters. All these characteristics make IVY O one of the most economical models on the market. The colour temperature is 4000 K and colour rendering index CRI > 80. The luminaire is ready to work in temperature that fluctuates from -30°C to even +45°C. The cooling radiator efficiently eliminates unnecessary heat. It is possible to mount the luminaire with the regulated bracket, which allows adjusting the lighting angles to our needs. IVY O is perfect for production halls/plants, warehouses and magazines. This luminaire is a great choice for those clients, who appreciate the functionality and original look at the same time.

Basic information

Family:	IVY O
Product:	IVY O Z OPT90 IP65 BL 840 346 D387
Index:	BLS0000009104
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	34600
Power of luminaire [W]	200
Luminaire's light efficiency [lm/W]	173
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B50
Operating temperature range [°C]	-20 ÷ +50
Driver	LED driver

Mechanical parameters:

Assembly	pendant
Material	aluminum
Color	anthracite
Diffuser	lenses
Impact resistant	IK09
Weight [kg]	5.00
Dimensions [mm]	ø387 x 160

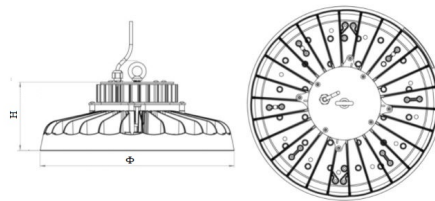

A graph of light

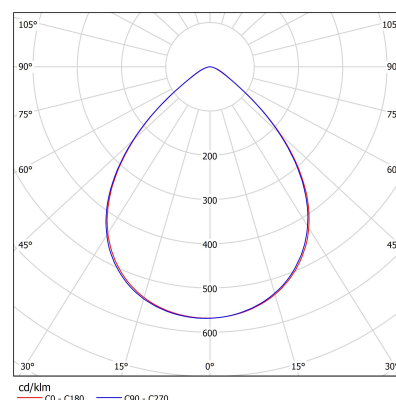

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025