

Description

Outdoor luminaire MALLOW is made out of steel plate which is black powder-lacquered (RAL 9005). It is possible to install an emergency module with the thermostat to exploitation in low temperatures (-25°C). MALLOW luminaire can be placed on the wall or on the ceiling. It is recommended to light buildings' entrances, tunnels, undergrounds' entrances and other circulation areas.

Basic information

Family:	MALLOW MINI K
Product:	MALLOW MINI K PC IP65 ANT 830 6 324
Index:	BLS0000009244z
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	693
Power of luminaire [W]	7
Luminaire's light efficiency [lm/W]	99
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	2
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	-25÷30
Driver	LED driver

Mechanical parameters:

Assembly	wall-mounted
Material	steel sheet
Color	anthracite
Diffuser	PC opalized polycarbonate
Impact resistant	IK08
Dimensions [mm]	324 x 90 x 70



A graph of light

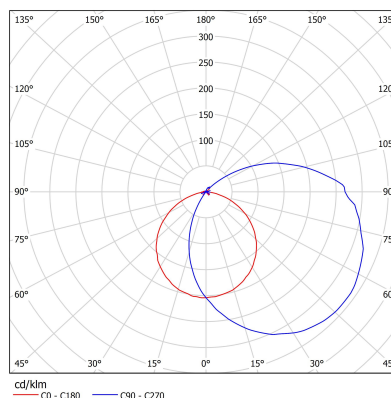

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 16-10-2025