

Description

Surface-mounted luminary FREESIA O is equipped with the highly-efficient LED light sources. The body of the product is made from white powder-lacquered steel plate.

Basic information

Family: FREESIA O
Product: FREESIA O N-ML PLX IP44 CMW-2f-PR BL 840 28 D500 H65
Index: BLS0000009359
Pictograms:




Lighting and electrical parameters

| | |
|---|---------------------|
| Light source | LED |
| Luminaire luminous flux [lm] | 2839 |
| Power of luminaire [W] | 22.5 |
| Luminaire's light efficiency [lm/W] | 126 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | I |
| Protection degree | IP44 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | LED driver |

Mechanical parameters:

| | |
|------------------|------------------------------|
| Assembly | ceiling mounted with magnets |
| Material | aluminum |
| Color | black |
| Diffuser | PLX opalized |
| Impact resistant | IK04 |
| Dimensions [mm] | ø475 x 65 |

A graph of light

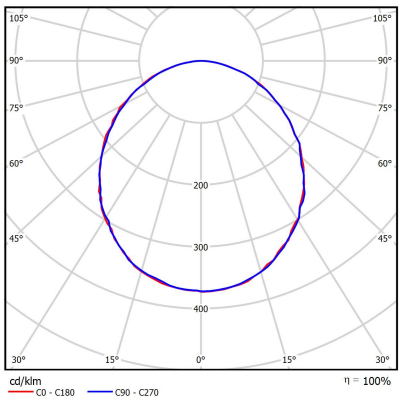

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 01-08-2025