



Description

Modern architectural luminary HONEY R SLIM (round) features an original pattern of the simple form. HONEY R SLIM has the shape of a circle. HONEY R luminary is designed to interiors that require demanding architectural solutions. It is perfect for hotel atriums, office receptions, architectural ateliers, conference rooms, corridors, halls in exclusive buildings and also cinemas, theatres or new-style shops in shopping centres

Basic information

Family: HONEY R Slim
Product: HONEY R SLIM N-ML PLX IP20/54 DALI ANT 840 42 D620
Index: BLS0000009503
Pictograms:




Lighting and electrical parameters

Light source	LED
Luminous flux LED [lm]	7308
LED power [W]	36
Luminaire luminous flux [lm]	4532
Power of luminaire [W]	40
Luminaire's light efficiency [lm/W]	113
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20/54
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	ceiling mounted with magnets
Material	aluminium
Color	anthracite
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	Ø620 x 85

A graph of light

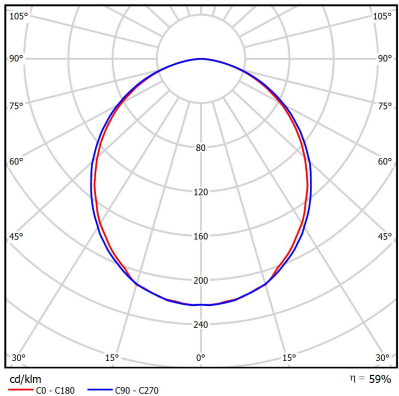

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024