



Description

Architectural Bee Art luminary LOBELIA is a lighting luminary that is equipped with the highly-efficient LED lighting sources. LOBELIA is made out of aluminium profile. LOBELIA luminaires are perfect to highlight the character of representative places; that have to maintain their elegant form, such as: entry area, receptions, restaurants, corridors etc.

Basic information

Family: **ORCHID N T LINIA**
Product: **ORCHID N T MPRM ALU 830 LINIA-EL-EP-S 52 600 600 600**
Index: **BLS0000010024**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	6387
LED power [W]	33
Luminaire luminous flux [lm]	5260
Power of luminaire [W]	36
Luminaire's light efficiency [lm/W]	146
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminium
Color	anodized aluminium
Diffuser	MPRM microprism
Impact resistant	IK06
Dimensions [mm]	534 534 537 x 60 x 72

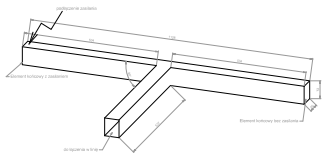

A graph of light

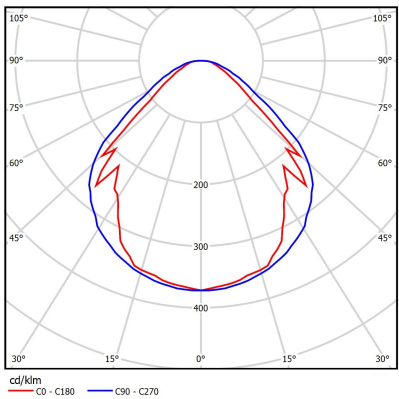

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024