



Description

Architectural Bee Art luminary LOBELIA is a lighting luminary that is equipped with the highly-efficient LED lighting sources. LOBELIA is made out of aluminium profile. LOBELIA luminaires are perfect to highlight the character of representative places; that have to maintain their elegant form, such as: entry area, receptions, restaurants, corridors etc.

Basic information

Family: **ORCHID N T LINIA**
Product: **ORCHID N T MPRM WH 830 LINIA-EL-EP-S 52 600 600 600**
Index: **BLS0000010028**
Pictograms:




Lighting and electrical parameters


| | |
|--|---------------------|
| Light source | LED |
| Luminous flux LED [lm] | 6387 |
| LED power [W] | 33 |
| Luminaire luminous flux [lm] | 5260 |
| Power of luminaire [W] | 36 |
| Luminaire's light efficiency [lm/W] | 146 |
| Color of the light [K] | 3000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | I |
| Protection degree | IP44 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 150000 |
| Lx/By | L80/B50 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | LED Driver |

Mechanical parameters:

| | |
|------------------------|------------------------------|
| Assembly | ceiling mounted |
| Material | aluminium |
| Color | white |
| Diffuser | MPRM microprism |
| Impact resistant | IK06 |
| Dimensions [mm] | 534 534 537 x 60 x 72 |

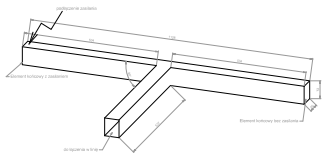

A graph of light

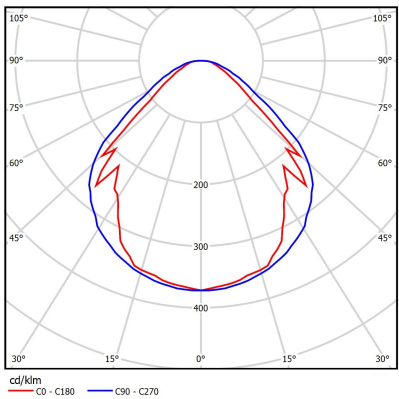

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024