


ORCHID Raster SLIM N



Description

Basic information

Family: **ORCHID Raster SLIM N**
Product: **ORCHID Raster SLIM N 65st BL 840 42 1135**
Index: **BLS0000010670**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4220
Power of luminaire [W]	28.5
Luminaire's light efficiency [lm/W]	148
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	65
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	72000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminum
Color	black
Diffuser	UGR 65° louvre
Impact resistant	IK04
Dimensions [mm]	1135 x 43 x 61



A graph of light

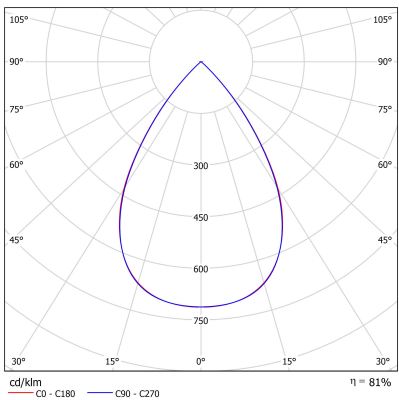

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 01-08-2025