


ORCHID Raster SLIM PZ



Description

Basic information

Family: ORCHID Raster SLIM PZ
Product: ORCHID Raster SLIM PZ-1,5m 65st WH 840 20 855
Index: BLS0000010756
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	2052
Power of luminaire [W]	13
Luminaire's light efficiency [lm/W]	158
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	65
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	72000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	pendant - slings required
Material	aluminum
Color	white
Diffuser	UGR 65° louvre
Impact resistant	IK04
Dimensions [mm]	855 x 43 x 61



A graph of light

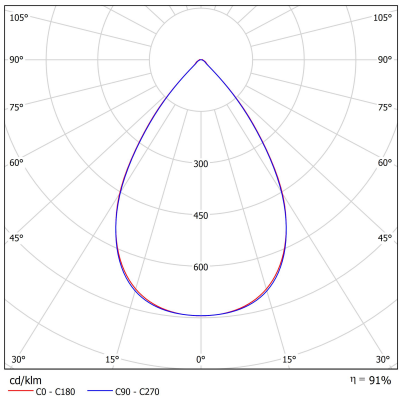

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025