


ORCHID Raster SLIM GK

Description



Basic information

Family: **ORCHID Raster SLIM GK**
Product: **ORCHID Raster SLIM GK 65st BL 840 29 57 5**
Index: **BLS0000010772**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	2977
Power of luminaire [W]	22
Luminaire's light efficiency [lm/W]	135
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	65
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	72000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	in the plasterboard ceiling
Material	aluminum
Color	black
Diffuser	UGR 65° louvre
Impact resistant	IK04
Dimensions [mm]	615 x 83 x 61
Mounting hole [mm]	585 x 50



A graph of light

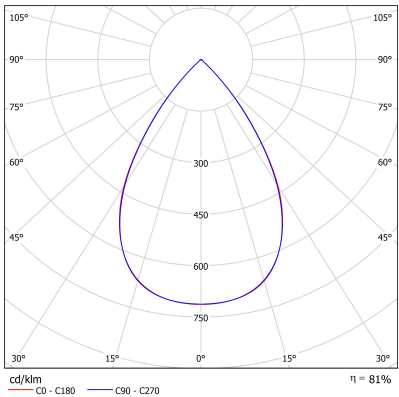

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025