

ORCHID SLIM PZ



Description

Surface-mounted luminary ORCHID SLIM is made out of anodized aluminium profile. ORCHID SLIM luminary is recommended for: office spaces, schools, universities, conference halls or public administration buildings etc.

Basic information

Family: **ORCHID SLIM PZ**
Product: **ORCHID SLIM PZ-1,5m PLX ALU 840 38 1135**
Index: **BLS0000010880**
Pictograms:




Lighting and electrical parameters


| | |
|--|-------------------|
| Light source | LED |
| Luminaire luminous flux [lm] | 3854 |
| Power of luminaire [W] | 32.1 |
| Luminaire's light efficiency [lm/W] | 120 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | I |
| Protection degree | IP44 |
| Voltage | 220-240V, 50-60Hz |
| Lifetime of LED sources [h] | 150000 |
| Lx/By | L80/B50 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | LED driver |

Mechanical parameters:

| | |
|--------------------|---------------------------|
| Assembly | pendant – slings required |
| Material | aluminum |
| Color | anodized aluminum |
| Diffuser | PLX opalized |
| Impact resistant | IK06 |
| Weight [kg] | 1.95 |
| Dimensions [mm] | 1135 x 43 x 61 |



A graph of light

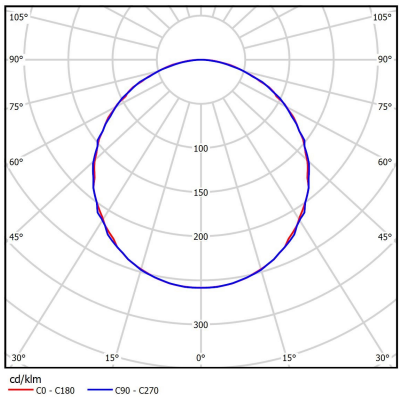

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025