

ORCHID SLIM PZ



Description

Surface-mounted luminaire ORCHID SLIM is made out of anodized aluminium profile. ORCHID SLIM luminaire is recommended for: office spaces, schools, universities, conference halls or public administration buildings etc.

Basic information

Family:	ORCHID SLIM PZ
Product:	ORCHID SLIM PZ-1,5m MPRM DALI ALU 840 30 1135
Index:	BLS0000010891
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	3053
Power of luminaire [W]	22.4
Luminaire's light efficiency [lm/W]	136
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	pendant – slings required
Material	aluminum
Color	anodized aluminum
Diffuser	MPRM microp prism
Impact resistant	IK06
Weight [kg]	1.95
Dimensions [mm]	1135 x 43 x 61



A graph of light

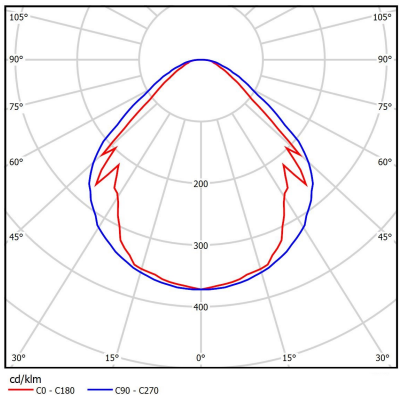

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025