Product card

ORCHID PZ

Description

Surface-mounted luminary ORCHID is made out of anodized aluminium profile. ORCHID luminary is recommended for: office spaces, schools, universities or public administration buildings etc.

Basic information

Family: **ORCHID PZ**

Product: **ORCHID PZ-1,5m MPRM ALU 840 39 855**

Index: **BLS0000011245**

Pictograms:

Lighting and electrical parameters

Light source	LED
Luminaire luminous flux [lm]	**3957**
Power of luminaire [W]	28
Luminaire's light efficiency [lm/W]	**141**
Color of the light [K]	4000
CRI	**>80**
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	**RG0**
Protection against electric shock	I
Protection degree	**IP44**
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	**150000**
Lx/By	L80/B50
Operating temperature range [°C]	**5÷30**
Driver	LED driver

Mechanical parameters:

Assembly	pendant - slings required
Material	**aluminum**
Color	anodized aluminum
Diffuser	**MPRM microprism**
Impact resistant	IK06
Dimensions [mm]	**855 x 60 x 72**



A graph of light

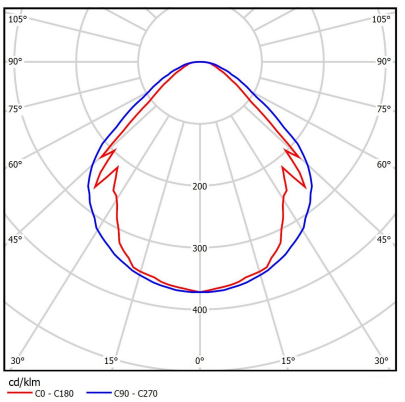

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 21-10-2025