




Description

Basic information

Family: ROSE C P
Product: ROSE C P MPRM SH WH IP65 940 38 600
Index: BLS0000011652
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4043
Power of luminaire [W]	29.6
Luminaire's light efficiency [lm/W]	137
Color of the light [K]	4000
CRI	>90
SDCM (LED sources)	5
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Diffuser	MPRM SH micropism tempered glass
Impact resistant	IK04
Dimensions [mm]	595 x 595 x 80



A graph of light

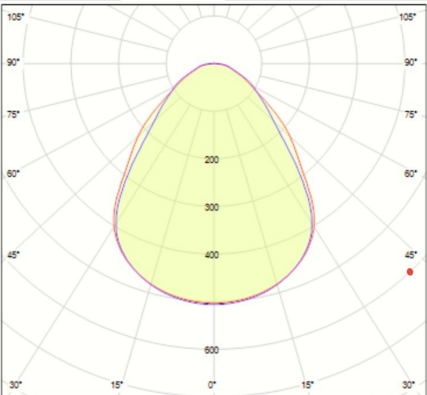

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025

Accessories

Index	BLS0000015166
Name	Złącza IP68 - THB.391.A3A 3P



Index	BLS0000015166
Name	Złącza IP68 - THB.391.A3A 3P

