

### Description

HOYA luminary is built from rectangular aluminium profiles that are galvanized. Simple flat shape creates elegantly presenting architectural element. Used LED light sources in this luminary enables to realize majority of the projects. Application: paths in gardens/parks, entrances to the properties, public spaces.

### Basic information

Family:	HOYA T
Product:	HOYA T G IP65 ANT 740 ST-S 2x56 3000x150x100
Index:	BLS0000011745
Pictograms:	




### Lighting and electrical parameters


Light source	LED
<b>Luminous flux LED [lm]</b>	<b>12240</b>
LED power [W]	73.4
<b>Luminaire luminous flux [lm]</b>	<b>11269</b>
Power of luminaire [W]	84
<b>Luminaire's light efficiency [lm/W]</b>	<b>134</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;70</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>I</b>
Protection degree	IP65
<b>Voltage</b>	<b>220-240 V, 50-60 Hz</b>
Lifetime of LED sources [h]	72000
<b>Lx/By</b>	<b>L70/B10</b>
Operating temperature range [°C]	-40 ÷ 50
<b>Driver</b>	<b>LED Driver</b>

### Mechanical parameters:

Assembly	ground
<b>Material</b>	<b>aluminium</b>
Color	anthracite
<b>Diffuser</b>	<b>transparent glass lenses</b>
Impact resistant	IK09
<b>Dimensions [mm]</b>	<b>3000 x 150 x 100</b>



### A graph of light

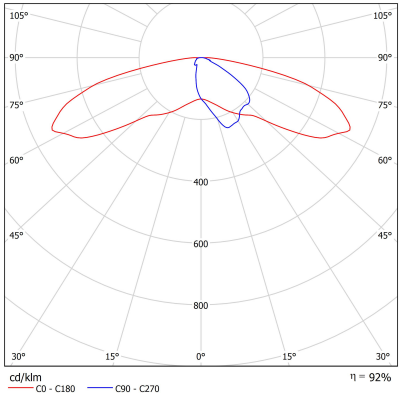

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024