



Description

HOYA luminaire is built from rectangular aluminium profiles that are galvanized. Simple flat shape creates elegantly presenting architectural element. Used LED light sources in this luminaire enables to realize majority of the projects. Application: paths in gardens/parks, entrances to the properties, public spaces.

Basic information

| | |
|-------------|--|
| Family: | HOYA T |
| Product: | HOYA T G IP65 ANT 740 ST-M 2x38 3000x120x120 |
| Index: | BLS0000011734 |
| Pictograms: | |




Lighting and electrical parameters


| | |
|--|----------------------------|
| Light source | LED |
| Luminous flux LED [lm] | 8550 |
| LED power [W] | 47 |
| Luminaire luminous flux [lm] | 7787 |
| Power of luminaire [W] | 54 |
| Luminaire's light efficiency [lm/W] | 144 |
| Color of the light [K] | 4000 |
| CRI | >70 |
| SDCM (LED sources) | 3 |
| Protection against electric shock | I |
| Protection degree | IP65 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 72000 |
| Lx/By | L70/B10 |
| Operating temperature range [°C] | -40 ÷ 50 |
| Driver | LED Driver |

Mechanical parameters:

| | |
|------------------------|---------------------------------|
| Assembly | ground |
| Material | aluminium |
| Color | anthracite |
| Diffuser | transparent glass lenses |
| Impact resistant | IK09 |
| Dimensions [mm] | 3000 x 120 x 120 |



A graph of light

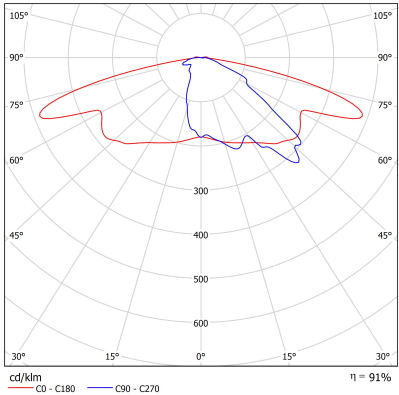

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 25-04-2024