

ASTER PRO ALU OPAL



Description

Basic information

Family: **ASTER PRO ALU OPAL**
Product: **ASTER PRO2 ALU N PC OPAL IP66 840 52 1200**
Index: **BLS0000011872**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	5234
Power of luminaire [W]	35
Luminaire's light efficiency [lm/W]	150
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	-25 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminum/polycarbonate
Color	gray
Diffuser	PC opalized polycarbonate
Impact resistant	IK10
Dimensions [mm]	1160 x 96 x 82

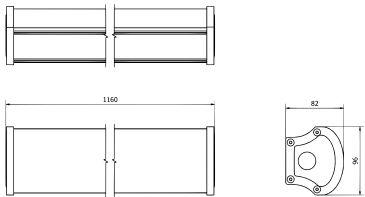

A graph of light

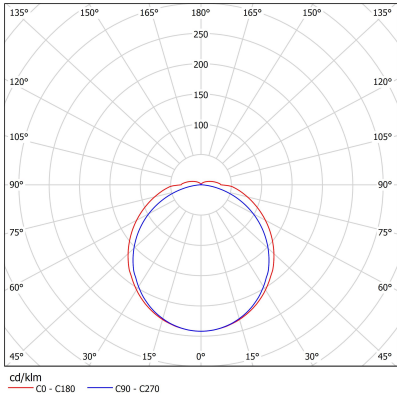

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025