

ASTER PRO ALU OPAL



Description

Basic information

Family: **ASTER PRO ALU OPAL**
Product: **ASTER PRO2 ALU N PC OPAL IP66 840 157 1200**
Index: **BLS0000011874**
Pictograms:




Lighting and electrical parameters


| | |
|--|---------------------|
| Light source | LED |
| Luminaire luminous flux [lm] | 15703 |
| Power of luminaire [W] | 101 |
| Luminaire's light efficiency [lm/W] | 155 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | I |
| Protection degree | IP66 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 150000 |
| Lx/By | L80/B50 |
| Operating temperature range [°C] | -25 ÷ 30 |
| Driver | LED driver |

Mechanical parameters:

| | |
|------------------------|----------------------------------|
| Assembly | ceiling mounted |
| Material | aluminum/polycarbonate |
| Color | grey |
| Diffuser | PC opalized polycarbonate |
| Impact resistant | IK10 |
| Dimensions [mm] | 1160 x 96 x 82 |

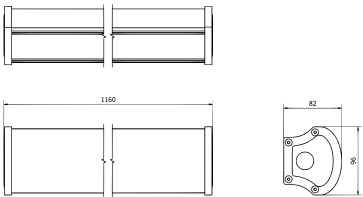

A graph of light

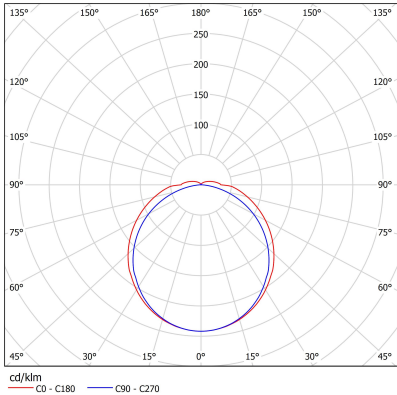

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 01-08-2025