




Description

Basic information

Family: **DAISYR**
Product: **DAISYR P PLX EU WH IP20/44 840 48 595**
Index: **BLS0000012013**
Pictograms:




Lighting and electrical parameters


| | |
|--|---------------------|
| Light source | LED |
| Luminaire luminous flux [lm] | 4824 |
| Power of luminaire [W] | 41.7 |
| Luminaire's light efficiency [lm/W] | 116 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 5 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | II |
| Protection degree | IP20/44 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 70000 |
| Lx/By | L70/B50 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | LED driver |

Mechanical parameters:

| | |
|------------------------|-----------------------------------|
| Assembly | recessed into the modular ceiling |
| Material | aluminum |
| Color | white |
| Diffuser | PLX opalized |
| Impact resistant | IK04 |
| Dimensions [mm] | 595 x 595 x 25 |

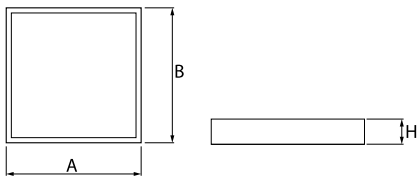

A graph of light

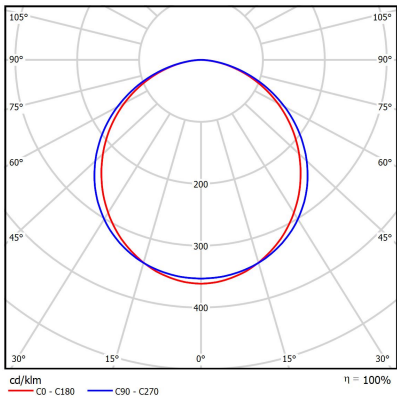

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 26-09-2025