

Description

Basic information

Family: **DAISYR**
Product: **DAISYR P MPRM EU WH IP20/44 840 43 1195x295**
Index: **BLS0000012015**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4344
Power of luminaire [W]	37.9
Luminaire's light efficiency [lm/W]	115
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	5
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminium
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	1195 x 295 x 25

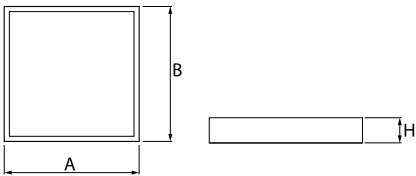

A graph of light

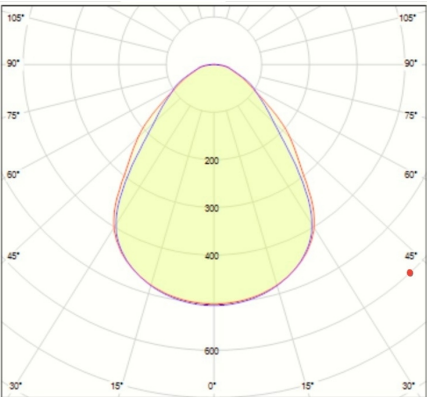

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024