

Description



Basic information

Family: **ASTER PRO OPAL**
Product: **ASTER PRO2 N PC OPAL IP65 840 123 1500**
Index: **BLS0000012151**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	16735
LED power [W]	64.4
Luminaire luminous flux [lm]	13187
Power of luminaire [W]	86
Luminaire's light efficiency [lm/W]	153
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B10
Operating temperature range [°C]	-25 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	ceiling mounted
Material	polycarbonate
Color	gray
Diffuser	PC opalized polycarbonate
Impact resistant	IK10
Weight [kg]	1.5
Dimensions [mm]	1480 x 85 x 67



A graph of light

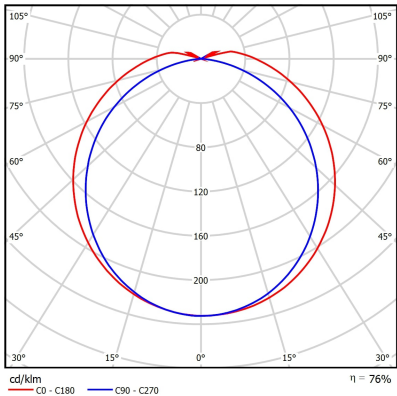

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024