




Description

Basic information

Family: **ASTER TRANSPARENT**  
Product: **ASTER PRO2 N PC-T IP65 840 114 1200**  
Index: **BLS0000012152**  
Pictograms:




Lighting and electrical parameters


|                                                  |                     |
|--------------------------------------------------|---------------------|
| Light source                                     | LED                 |
| <b>Luminous flux LED [lm]</b>                    | <b>13200</b>        |
| LED power [W]                                    | 64.4                |
| <b>Luminaire luminous flux [lm]</b>              | <b>11484</b>        |
| Power of luminaire [W]                           | 68                  |
| <b>Luminaire's light efficiency [lm/W]</b>       | <b>169</b>          |
| Color of the light [K]                           | 4000                |
| <b>CRI</b>                                       | <b>&gt;80</b>       |
| SDCM (LED sources)                               | 3                   |
| <b>Photobiological risk class (IEC/EN 62471)</b> | <b>RG0</b>          |
| Protection against electric shock                | I                   |
| <b>Protection degree</b>                         | <b>IP65</b>         |
| Voltage                                          | 220-240 V, 50-60 Hz |
| <b>Lifetime of LED sources [h]</b>               | <b>150000</b>       |
| Lx/By                                            | L80/B10             |
| <b>Operating temperature range [°C]</b>          | <b>-25 ÷ 30</b>     |
| Driver                                           | LED Driver          |

Mechanical parameters:

|                    |                                     |
|--------------------|-------------------------------------|
| Assembly           | ceiling mounted                     |
| <b>Material</b>    | <b>polycarbonate</b>                |
| Color              | gray                                |
| <b>Diffuser</b>    | <b>PC transparent polycarbonate</b> |
| Impact resistant   | IK10                                |
| <b>Weight [kg]</b> | <b>1.5</b>                          |
| Dimensions [mm]    | 1190 x 85 x 67                      |



A graph of light

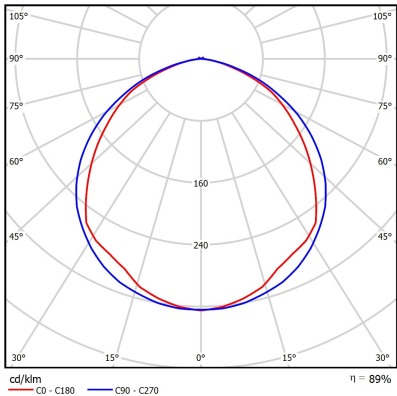

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 25-04-2024