

Description



Basic information

Family: **ORCHID C PZ**
Product: **ORCHID C PZ-1,5m MPRM DALI ALU 840 36 852**
Index: **BLS0000012187**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	4380
LED power [W]	25.5
Luminaire luminous flux [lm]	3605
Power of luminaire [W]	28.05
Luminaire's light efficiency [lm/W]	129
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	90000
Lx/By	L70/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	pendant - slings required
Material	aluminium
Color	anodized aluminium
Diffuser	MPRM microprism
Impact resistant	IK06
Dimensions [mm]	852 x 60 x 74



A graph of light

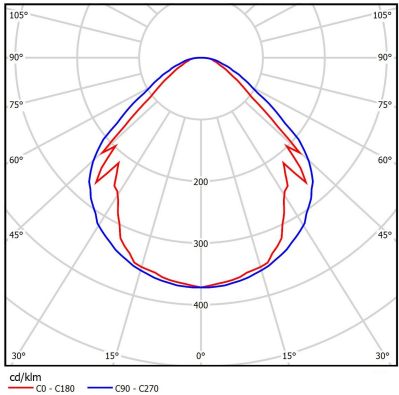

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024