



Description

Basic information

Family: WEIGELA OD  
Product: WEIGELA OD N PC-T OPT-20/50 IP66 ALU 840 8 320  
Index: BLS0000012399  
Pictograms:



Lighting and electrical parameters


|                                           |                   |
|-------------------------------------------|-------------------|
| Light source                              | LED               |
| Luminaire luminous flux [lm]              | 849               |
| Power of luminaire [W]                    | 6.3               |
| Luminaire's light efficiency [lm/W]       | 135               |
| Color of the light [K]                    | 4000              |
| CRI                                       | >80               |
| SDCM (LED sources)                        | 3                 |
| Photobiological risk class (IEC/EN 62471) | RG0               |
| Protection against electric shock         | I                 |
| Protection degree                         | IP66              |
| Voltage                                   | 220-240V, 50-60Hz |
| Lifetime of LED sources [h]               | 90000             |
| Lx/By                                     | L70/B10           |
| Operating temperature range [°C]          | -25 ÷ +30         |
| Driver                                    | LED driver 300mA  |

Mechanical parameters:

|                  |                                |
|------------------|--------------------------------|
| Assembly         | ceiling mounted                |
| Material         | aluminum/polycarbonate         |
| Color            | aluminum                       |
| Diffuser         | PC-T transparent polycarbonate |
| Impact resistant | IK10                           |
| Dimensions [mm]  | L=320 H=67.6 W=55.4            |



A graph of light

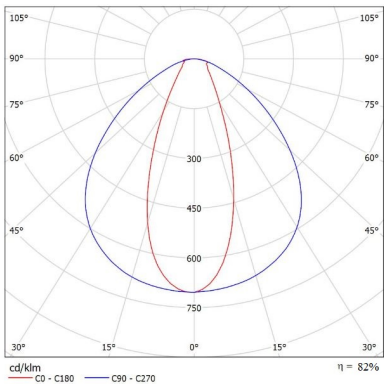

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 18-08-2025