



Description

Basic information

Family: WEIGELA OD
Product: WEIGELA OD N PC-T OPT-20/50 IP66 ALU 840 44 1160
Index: BLS0000012413
Pictograms:



Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4494
Power of luminaire [W]	34.3
Luminaire's light efficiency [lm/W]	131
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	90000
Lx/By	L70/B10
Operating temperature range [°C]	-25 ÷ +30
Driver	LED driver 400mA

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminum/polycarbonate
Color	aluminum
Diffuser	PC-T transparent polycarbonate
Impact resistant	IK10
Dimensions [mm]	L=1160 H=67,6 S=55,4



A graph of light

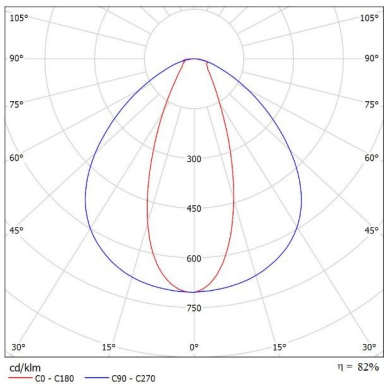

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 01-08-2025