



Description

Basic information

Family: **TULIP S**  
Product: **TULIP S 38st 3F WH Meat vivid 31 D90**  
Index: **BLS0000012749**  
Pictograms:




Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>3177</b>
Power of luminaire [W]	39
<b>Luminaire's light efficiency [lm/W]</b>	<b>81</b>
Color of the light [K]	3100
<b>SDCM (LED sources)</b>	<b>3</b>
Beam angle [°]	38st
<b>Protection against electric shock</b>	<b>II</b>
Protection degree	IP20
<b>Voltage</b>	<b>220-240 V, 50-60 Hz</b>
Lifetime of LED sources [h]	56000
<b>Lx/By</b>	<b>L80/B10</b>
Operating temperature range [°C]	5 ÷ 30
<b>Driver</b>	<b>LED driver</b>

Mechanical parameters:

Assembly	for 3-circuit track
<b>Material</b>	<b>aluminum</b>
Color	white
<b>Impact resistant</b>	<b>IK04</b>
Dimensions [mm]	D90 x 108



A graph of light

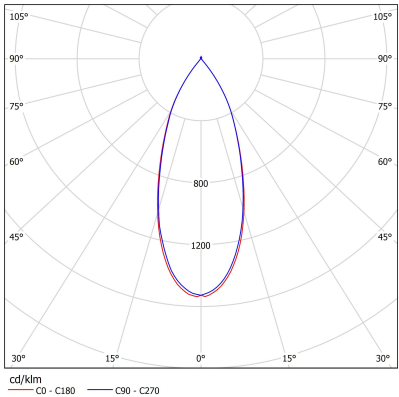

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 09-10-2025