



Description

Basic information

Family: TULIP L  
Product: TULIP L 15st 3F WH 840 36 D90  
Index: BLS0000012760  
Pictograms:




Lighting and electrical parameters


|                                     |                     |
|-------------------------------------|---------------------|
| Light source                        | LED                 |
| Luminous flux LED [lm]              | 4132                |
| LED power [W]                       | 23.5                |
| Luminaire luminous flux [lm]        | 3620                |
| Power of luminaire [W]              | 26                  |
| Luminaire's light efficiency [lm/W] | 139                 |
| Color of the light [K]              | 4000                |
| CRI                                 | >80                 |
| SDCM (LED sources)                  | 3                   |
| Beam angle [°]                      | 15st                |
| Protection against electric shock   | I                   |
| Protection degree                   | IP20                |
| Voltage                             | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h]         | 70000               |
| Lx/By                               | L80/B10             |
| Operating temperature range [°C]    | 5 ÷ 30              |
| Driver                              | LED Driver          |

Mechanical parameters:

|                  |               |
|------------------|---------------|
| Assembly         | 3-phase track |
| Material         | aluminium     |
| Color            | white         |
| Impact resistant | IK04          |
| Dimensions [mm]  | D90 x 190     |



A graph of light

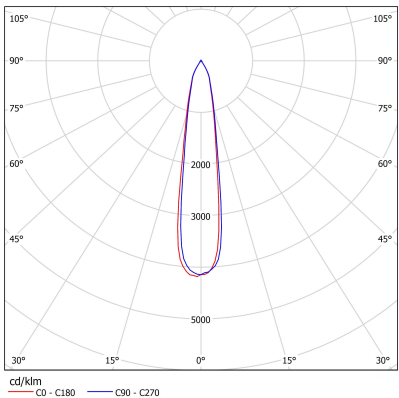

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 08-05-2024