



Description

Basic information

Family: TULIP L  
Product: TULIP L 38st 3F BL 840 19 D90  
Index: BLS0000012850  
Pictograms:




Lighting and electrical parameters


|                                            |                     |
|--------------------------------------------|---------------------|
| Light source                               | LED                 |
| <b>Luminous flux LED [lm]</b>              | <b>2265</b>         |
| LED power [W]                              | 11.2                |
| <b>Luminaire luminous flux [lm]</b>        | <b>1952</b>         |
| Power of luminaire [W]                     | 12                  |
| <b>Luminaire's light efficiency [lm/W]</b> | <b>163</b>          |
| Color of the light [K]                     | 4000                |
| <b>CRI</b>                                 | <b>&gt;80</b>       |
| SDCM (LED sources)                         | 3                   |
| <b>Beam angle [°]</b>                      | <b>38st</b>         |
| Protection against electric shock          | I                   |
| <b>Protection degree</b>                   | <b>IP20</b>         |
| Voltage                                    | 220-240 V, 50-60 Hz |
| <b>Lifetime of LED sources [h]</b>         | <b>70000</b>        |
| Lx/By                                      | L80/B10             |
| <b>Operating temperature range [°C]</b>    | <b>5 ÷ 30</b>       |
| Driver                                     | LED Driver          |

Mechanical parameters:

|                         |                  |
|-------------------------|------------------|
| Assembly                | 3-phase track    |
| <b>Material</b>         | <b>aluminium</b> |
| Color                   | black            |
| <b>Impact resistant</b> | <b>IK04</b>      |
| Dimensions [mm]         | D90 x 190        |



A graph of light

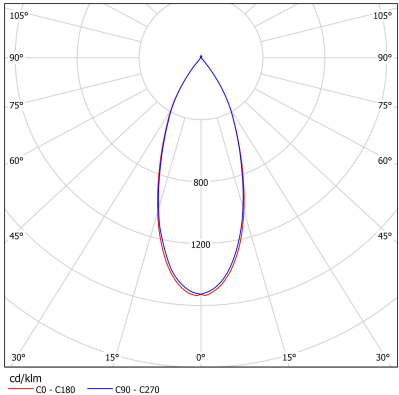

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 14-05-2024