



Description

Basic information

Family: TULIP L  
Product: TULIP L 60st 3F BL 940 43 D90  
Index: BLS0000012855  
Pictograms:




Lighting and electrical parameters


Light source	LED
<b>Luminous flux LED [lm]</b>	<b>4979</b>
LED power [W]	35.7
<b>Luminaire luminous flux [lm]</b>	<b>4332</b>
Power of luminaire [W]	39
<b>Luminaire's light efficiency [lm/W]</b>	<b>111</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;90</b>
SDCM (LED sources)	3
<b>Beam angle [°]</b>	<b>60st</b>
Protection against electric shock	I
<b>Protection degree</b>	<b>IP20</b>
Voltage	220-240 V, 50-60 Hz
<b>Lifetime of LED sources [h]</b>	<b>70000</b>
Lx/By	L80/B10
<b>Operating temperature range [°C]</b>	<b>5 ÷ 30</b>
Driver	LED Driver

Mechanical parameters:

Assembly	3-phase track
<b>Material</b>	<b>aluminium</b>
Color	black
<b>Impact resistant</b>	<b>IK04</b>
Dimensions [mm]	D90 x 190



A graph of light

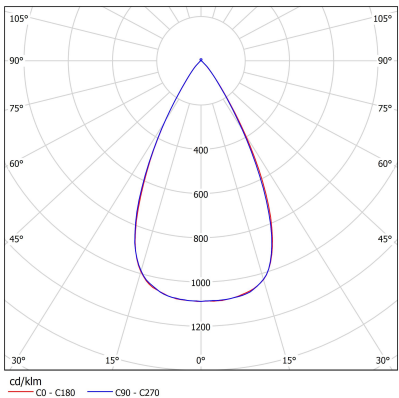

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 14-05-2024