



Description

Basic information

Family: TULIP L  
Product: TULIP L 60st 3F BL Meat vivid 32 D90  
Index: BLS0000012863  
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	3686
LED power [W]	35.7
Luminaire luminous flux [lm]	3207
Power of luminaire [W]	39
Luminaire's light efficiency [lm/W]	82
Color of the light [K]	3100
SDCM (LED sources)	3
Beam angle [°]	60st
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	56000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	3-phase track
Material	aluminium
Color	black
Impact resistant	IK04
Dimensions [mm]	D90 x 190



A graph of light

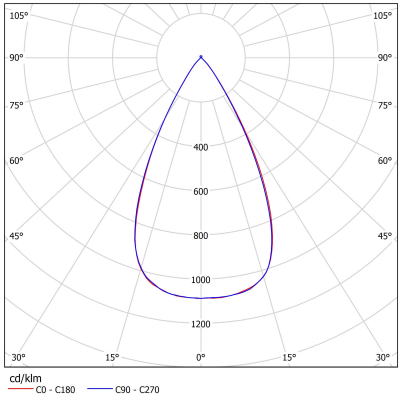

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 14-05-2024