




Description

Basic information

Family: **ASTER PRO OPT**
Product: **ASTER PRO N PC-T OPT-HR DALI IP66 840 ZASILANIE PRZELOTOWE 16A 26 1200**
Index: **BLS0000012895**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	2640
Power of luminaire [W]	17.6
Luminaire's light efficiency [lm/W]	150
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	OPT-HR
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	-25 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	ceiling mounted
Material	polycarbonate
Color	gray
Diffuser	PC transparent polycarbonate
Impact resistant	IK10
Dimensions [mm]	1190 x 85 x 67



A graph of light

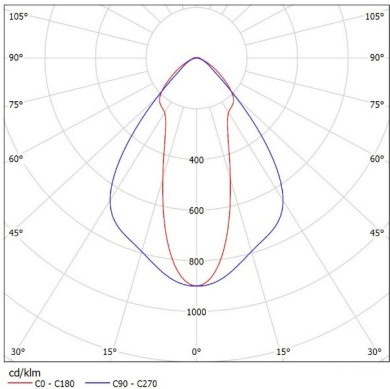

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025