



Description

Outdoor LED floodlight with professional LEDs and various lens optical systems, making the luminaire suitable for lighting access roads, car parks, green areas, but also building illumination or accent lighting

Basic information

Family: **PUMPKIN PRO OD**
 Product: **PUMPKIN PRO L OD SH ANT FL IP66 740 270 352x416**
 Index: **BLS0000013362**
 Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	27021
Power of luminaire [W]	192
Luminaire's light efficiency [lm/W]	141
Color of the light [K]	4000
CRI	>70
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	102000
Lx/By	L90/B10
Operating temperature range [°C]	- 50 ÷ +45
Driver	LED driver

Mechanical parameters:

Assembly	wall-mounted
Material	aluminum
Color	anthracite
Diffuser	SH tempered glass
Impact resistant	IK09
Weight [kg]	3.50
Dimensions [mm]	352 x 416 x 58

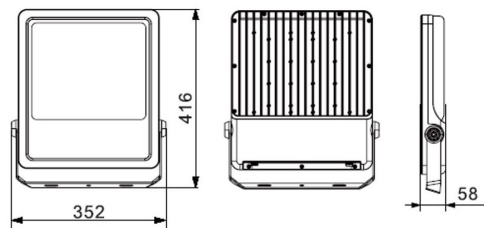

A graph of light

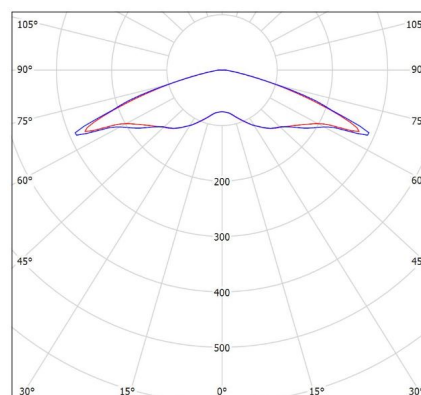

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025