



Description

Indoor LED floodlight with professional LEDs and various lens optical systems, making the luminaire suitable for sport halls, warehouses, production areas

Basic information

Family: PUMPKIN PRO  
Product: PUMPKIN PRO XL SH ANT ST-M IP66 740 317 408x481  
Index: BLS0000013390  
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	31723
Power of luminaire [W]	229
Luminaire's light efficiency [lm/W]	139
Color of the light [K]	4000
CRI	>70
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	102000
Lx/By	L90/B10
Operating temperature range [°C]	- 50 ÷ +45
Driver	LED driver

Mechanical parameters:

Assembly	wall-mounted
Material	aluminum
Color	anthracite
Diffuser	SH tempered glass
Impact resistant	IK09
Weight [kg]	4.7
Dimensions [mm]	408 x 481 x 60

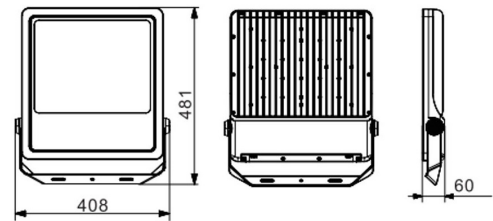

A graph of light

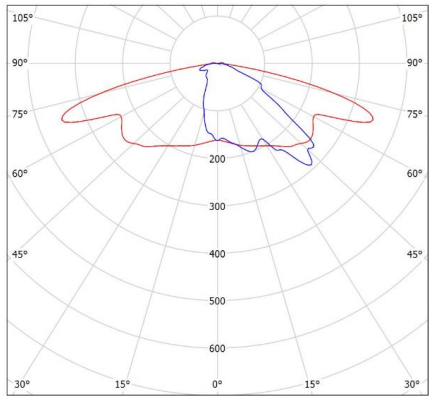

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-09-2025

# Accessories

Index	BLS0000015166
Name	Złączka IP68 - THB.391.A3A 3P



Index	BLS0000015166
Name	Złączka IP68 - THB.391.A3A 3P

