



Description

LILY OD N outdoor luminaire – it is intended for ceiling mounting on the outside of the building. Aluminium body, transparent glass, or transparent glass with additional milky diffuser. Intension – lighting entrances to buildings, arcades, terraces, balconies.

Basic information

Family: **LILY OD O N**
 Product: **LILY OD O N SH+PLX BL IP65 830 11 D120**
 Index: **BLS0000013683**
 Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1133
Power of luminaire [W]	9.4
Luminaire's light efficiency [lm/W]	121
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	2
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-25 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminum
Color	black
Diffuser	ST transparent glass + PLX
Impact resistant	IK10
Dimensions [mm]	D120 x 168



A graph of light

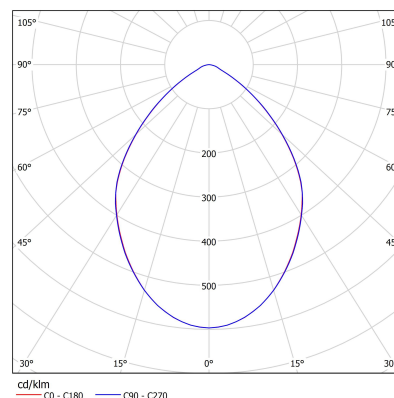

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025