



Description

Recessed luminaire LILY O P is made out of aluminium profile. The LILY MW luminaire is equipped with a multi-range power supply (MultiWatt), thanks to which the installer can select the power of the luminaire when connecting the luminaire, so the same luminaire can be used for many solutions, with several flux/power levels. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

| | |
|-------------|--|
| Family: | LILY O P |
| Product: | LILY O P MPRM MW WH IP20/44 840 23-31 D165 |
| Index: | BLS0000014020 |
| Pictograms: | |



Lighting and electrical parameters


| | |
|--|--|
| Light source | LED |
| Luminous flux LED [lm] | #VALUE! |
| LED power [W] | 17 - 24 |
| Luminaire luminous flux [lm] | #VALUE! |
| Power of luminaire [W] | 19 - 26,5 |
| Luminaire's light efficiency [lm/W] | #VALUE! |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 2 |
| Beam angle [°] | 88 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | II |
| Protection degree | IP20/44 |
| Voltage | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | LED Driver MultiWatt |
| LED driver settings | 19W - 2374lm 21W - 2574lm 22,5W - 2743lm 26,5W - 3156lm |

Mechanical parameters:

| | |
|---------------------------|--|
| Assembly | recessed into the modular and plasterboard ceiling |
| Material | aluminium |
| Color | white |
| Diffuser | MPRM microp prism |
| Impact resistant | IK04 |
| Weight [kg] | 1 |
| Dimensions [mm] | Ø165 x 100 |
| Mounting hole [mm] | Ø140 |



A graph of light

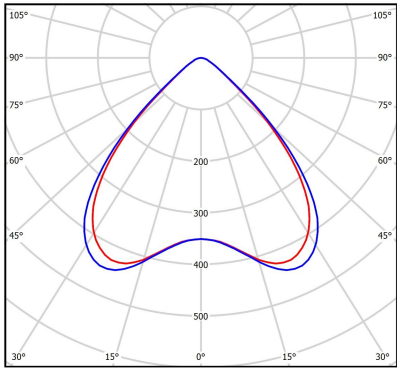

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024