



Description

Recessed luminaire LILY O P is made out of aluminium profile. The LILY MW luminaire is equipped with a multi-range power supply (MultiWatt), thanks to which the installer can select the power of the luminaire when connecting the luminaire, so the same luminaire can be used for many solutions, with several flux/power levels. LILY O P luminaires are recommended to interiors with professional characters, such as hotels, banks, offices etc.

Basic information

Family: **LILY O P**
Product: **LILY O P MW WH IP20/44 840 25-33 D165**
Index: **BLS0000014021**
Pictograms:



Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	#VALUE!
LED power [W]	17 - 24
Luminaire luminous flux [lm]	#VALUE!
Power of luminaire [W]	19 - 26,5
Luminaire's light efficiency [lm/W]	#VALUE!
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	2
Beam angle [°]	70
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver MultiWatt
LED driver settings	19W - 2531lm 21W - 2745lm 22,5W - 2924lm 26,5W - 3364lm

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	aluminium
Color	white
Diffuser	ST transparent glass
Impact resistant	IK04
Weight [kg]	0.95
Dimensions [mm]	Ø165 x 100
Mounting hole [mm]	Ø140



A graph of light

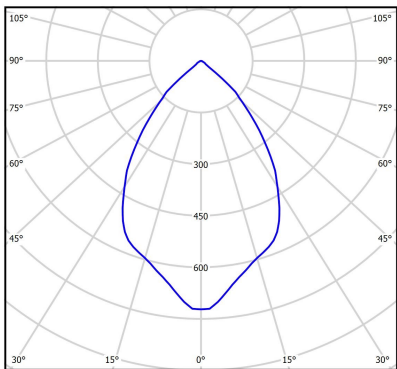

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024