



Description

Surface-mounted luminaire CROCUS is made out of white powder-lacquered steel plate. The CROCUS MW luminaire is equipped with a multi-range power supply (MultiWatt), thanks to which the installer can select the power of the luminaire when connecting the luminaire, so the same luminaire can be used for many solutions, with several flux/power levels. The polymethyl methacrylate luminary's shade is opalized.

Basic information

Family:	CROCUS
Product:	CROCUS N OPAL MW 840 32-46 1255
Index:	BLS0000014027
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	#VALUE!
LED power [W]	24 - 36
Luminaire luminous flux [lm]	#VALUE!
Power of luminaire [W]	24 - 36
Luminaire's light efficiency [lm/W]	#VALUE!
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP20
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver MultiWatt
LED driver settings	24W - 3268lm 31W - 4033lm 36W - 4648lm

Mechanical parameters:

Assembly	ceiling mounted
Material	steel sheet
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Weight [kg]	2.9
Dimensions [mm]	1193 x 207 x 68



A graph of light

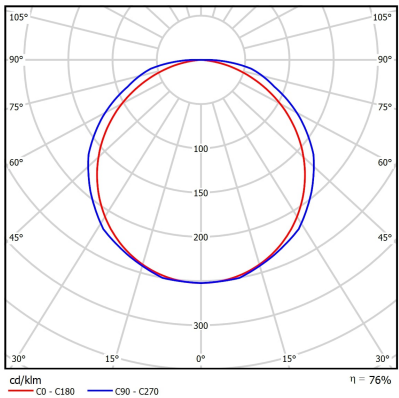

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024