



Description

Basic information

Family:	DAISY HEX
Product:	DAISY HEX P EU MW T W 830/840/865 33-47 595
Index:	BLS0000014120
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4726 - 3340
Power of luminaire [W]	38,3 - 24,8
Luminaire's light efficiency [lm/W]	123 - 135
Color of the light [K]	3000 - 4000 - 6500
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/40
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	70000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver
LED driver settings	840: 38,3W - 4726lm / 28,2W - 3781lm 840: 24,8W - 3340 lm 830: 38,3W - 4395 lm / 28,2W - 3516 lm 830: 24,8W - 3106 lm 865: 38,3W - 4726 lm / 28,2W - 3781 lm 865: 24,8W - 3340 lm

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Diffuser	special hexagonal louvre system
Impact resistant	IK04
Dimensions [mm]	595 x 595 x 45

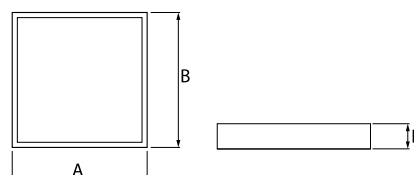

A graph of light

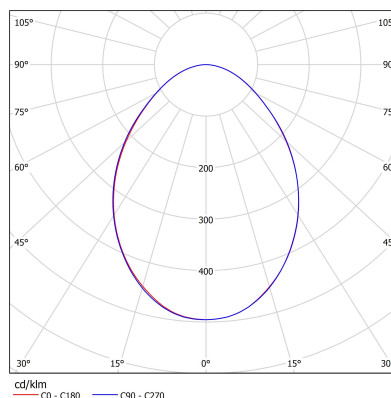

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 17-09-2025