



Description

Basic information

Family: DAISY PRO
Product: DAISY PRO P MPRM MW WH IP20/44 840 48-55-67 596
Index: BLS0000014131
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4871 - 6703
Power of luminaire [W]	31,8 - 45,3
Luminaire's light efficiency [lm/W]	153 - 148
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver
LED driver settings	45,3W - 6703 lm 36,3W - 5512 lm 31,8W - 4871 lm

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	596 x 596 x 34

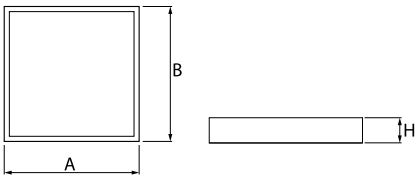

A graph of light

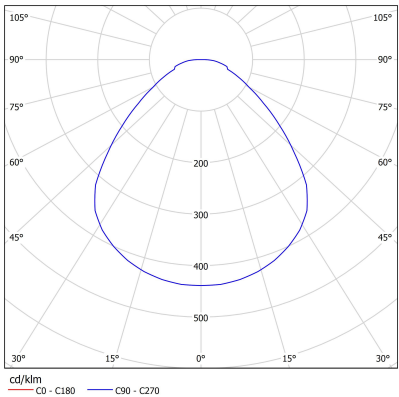

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025