



Description

Basic information

Family: DAISY PRO
Product: DAISY PRO P PLX MW WH IP20/44 840 51-58-70 596
Index: BLS0000014132
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	5145 - 7088
Power of luminaire [W]	31,8 - 45,3
Luminaire's light efficiency [lm/W]	162 - 157
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver
LED driver settings	45,3W - 7088 lm 36,3W - 5808 lm 31,8W - 5145 lm

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	596 x 596 x 34

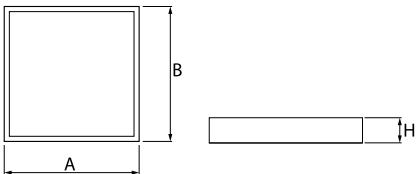

A graph of light

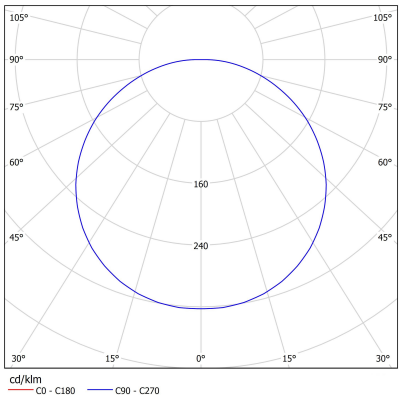

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025