



Description

Basic information

Family: DAISY PRO
Product: DAISY PRO P MPRM EU MW WH IP20/65 840 20-67 596
Index: BLS0000014135
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	2034 - 6703
Power of luminaire [W]	12,6 - 45,3
Luminaire's light efficiency [lm/W]	161 - 148
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	MultiWatt driver
LED driver settings	12,6W - 2034 lm / 17W - 2685 lm 21,2W - 3323 lm / 25,4W - 3948 lm 29,6W - 4560 lm / 34W - 5185 lm 36,3W - 5512 lm / 38,5W - 5807 lm 40,7W - 6099 lm / 43,1W - 6416 lm 45,3W - 6703 lm

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Diffuser	MPRM microprism
Impact resistant	IK04
Dimensions [mm]	596 x 596 x 34

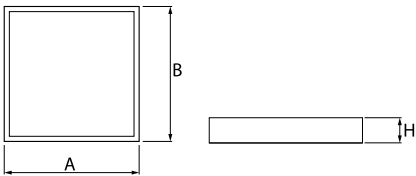

A graph of light

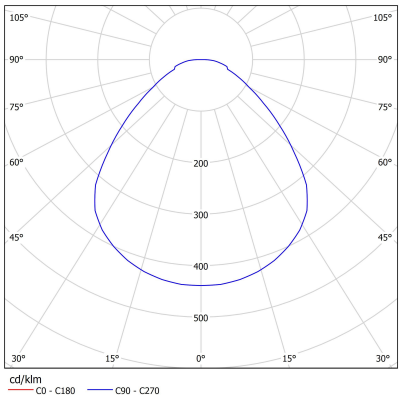

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025