



Description

HOYA luminaire is built from rectangular aluminium profiles that are galvanized. Simple flat shape creates elegantly presenting architectural element. Used LED light sources in this luminaire enables to realize majority of the projects. Application: paths in gardens/parks, entrances to the properties, public spaces.

Basic information

Family:	HOYA 2T
Product:	HOYA 2T G IP65 ANT 740 ST-M 4x61 3000x150x150
Index:	BLS0000014240
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	24628
Power of luminaire [W]	163
Luminaire's light efficiency [lm/W]	151
Color of the light [K]	4000
CRI	>70
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	102000
Lx/By	L90/B10
Operating temperature range [°C]	-40 ÷ 50
Driver	LED driver

Mechanical parameters:

Assembly	ground-mounted
Material	aluminum
Color	anthracite
Diffuser	transparent glass lenses
Impact resistant	IK09
Dimensions [mm]	3000 x 150 x 150



A graph of light

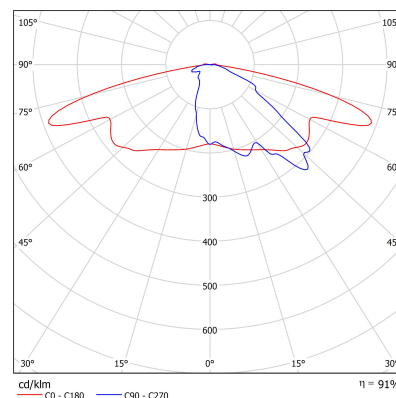

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 01-08-2025

Accessories


Index	BLS0000005917
Name	Fundament B50



Index	BLS0000009053
Name	Komplet nakrętek montażowych słupa + kapturek maskujący czarnym - do B-50



Index	BLS0000016279
Name	HOYA G 150x100 - Cover ANT

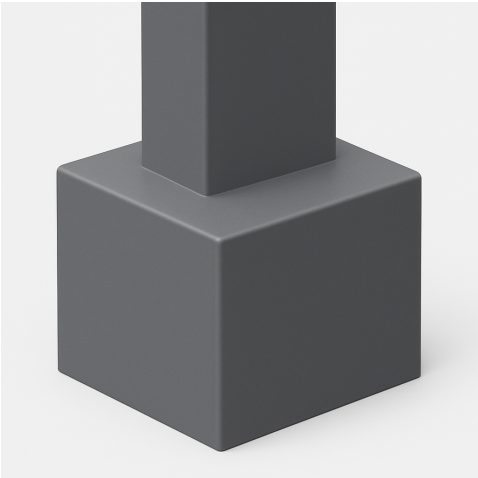

Index	BLS0000009083
Name	Izolacyjne złącze bezpiecznikowe IZK-4-01

