


BEE-MAIN WIRELESS

Description

Surface-mounted luminaire ORCHID is made out of anodized aluminium profile. ORCHID luminaire is recommended for: office spaces, schools, universities or public administration buildings etc.

Basic information

Family:	BEE-MAIN WIRELESS
Product:	ORCHID N MPRM BM WIRELESS SLAVE ALU 840 39 1135
Index:	BLS0000014397
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	3994
Power of luminaire [W]	27.2
Luminaire's light efficiency [lm/W]	147
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminum
Color	anodized aluminum
Diffuser	MPRM micropism
Impact resistant	IK06
Weight [kg]	1.95
Dimensions [mm]	1135 x 60 x 72



A graph of light

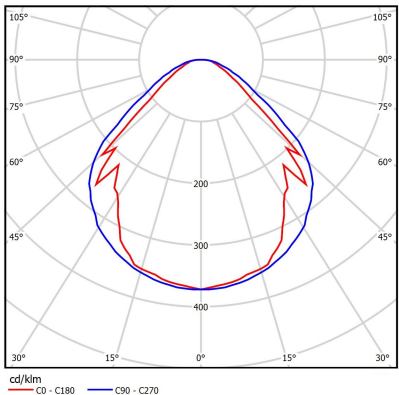

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025